


SIZE CHART

	KDL-05	KDL-08	KDL-10	KDL-05 DL	KDL-08 DL
A : DISC THICKNESS	LESS THAN 6mm			LESS THAN 6mm	
B : PIN O.D.	5	8	10	5	8
C : DISC WIDTH	35	50	55	35	50
D : SHAFT O.D.	14 (24)*	16 (26)*	20 (35)*	20 (35)*	
E : SHAFT LENGTH	107		120	115	

* SIZE WITH PROTECTION SPONGE

UNIT (mm)

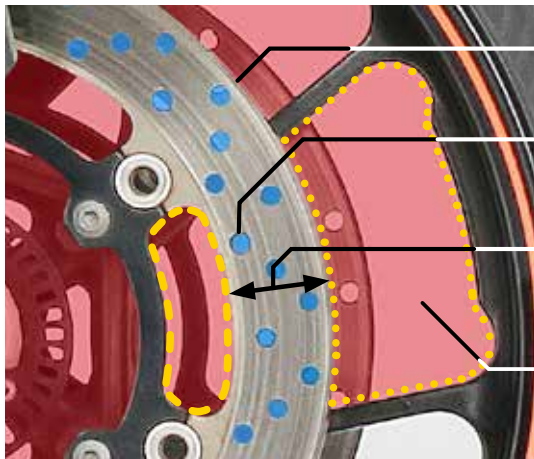

A : DISC THICKNESS ■

Make sure that disc rotor thickness (A) is less than 6mm

B : PIN O.D. ■ (5/8/10mm)

Small pin O.D. DISC is usable.
 Put the pin through disc rotor hole ● to fix.

C : DISC WIDTH

Fix disc rotor to 35/50/55 mm C ■

D : SHAFT SPACE ●●●●

●●●● Make sure there is enough room for shaft vertically.

Disc lock might not be usable for following conditions.

- There are no ● on disc rotor. There is not enough space between inner & outer disc (no space for pin) ●●●●
- There is not enough space due to spokes and dish wheel (shaft does not go vertically against disc)



HONDA CBR250RR
KDL-05



HONDA CB400SF
KDL-05



YAMAHA DS250
KDL-10



YAMAHA MT-09
KDL-08



KAWASAKI NINJA400
KDL-10



SUZUKI SD650
KDL-05 DL



SUZUKI V-STORM1000
KDL-05 DL



HARLEY-DAVIDSON
Night Rod Special
(Custom Wheel) KDL-08 DL