

Z125 PRO

Corrects speed display error when exchanging sprockets / tires !!



Corrects speedometer error display.
No harness mods required as coupler-

SPEED PULSE CONVERT UNIT

CODE	PRICE
762-4030100	¥12,000
● CORRECTS SPEED ERRORS CAUSED FROM SPROCKET TEETH / TIRE SIZE CHANGE ● CASE SIZE : 49 × 30 × 22mm	
APPLICATION	Z125 PRO (BR125H)

※ Speed sensor kit is not completely waterproof.
Place it to somewhere that does not get wet.
※ Precision screwdriver is required to open the lid.



EASY SETTING!!

Open the lid, input front / rear sprocket teeth and tire size with the button.

DRIVE / DRIVEN SPROCKET for Z125 PRO LINE-UP!!



DRIVE SPROCKET (FRONT)

14T	530-4021214	¥1,300
15T *	530-4021215	¥1,350
16T *	530-4021216	¥1,400

● 420 SIZE
● S45C (HIGH CARBON STEEL) ADOPTED
※ REMOVING STOCK GUIDE PLATE REQUIRED WHEN USING 15/16T



DRIVEN SPROCKET (REAR)


27T	535-4021227	¥1,600
29T	535-4021229	¥1,650
33T	535-4021233	¥1,900
35T	535-4021235	¥1,950
37T	535-4021237	¥2,000

● 420 SIZE

DIRECT BRAKE TOUCH AND HIGH DURABILITY!



Converts braking touch to rear caliper.

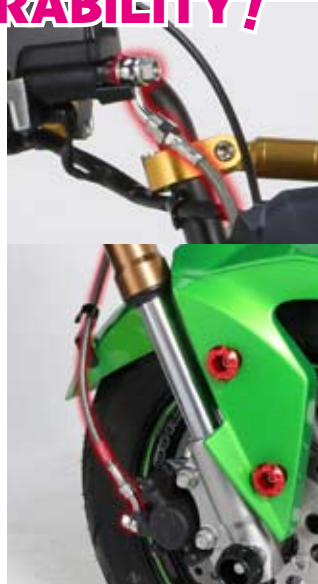

BRAKE HOSE
3-layer construction of teflon / stainless steel / outer tube


FITTING
3-piece construction with caulking method.

SUPER TEFLON STAINLESS STEEL MESH BRAKE HOSE SET

CODE	PRICE
773-4030100	¥7,800
● FOR FRONT ● STAINLESS STEEL BANJO BOLT / SEALING WASHER INCLUDED ● FITTING (HOSE) / C X 2 (755mm)	
APPLICATION	Z125 PRO (BR125H)

※ BRAKE FLUID (SOLD SEPARATELY) REQUIRED

~ BRAKE HOSE MEASUREMENT ~

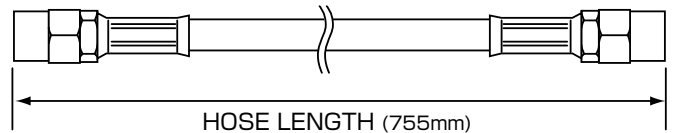

※ The length written above is the length of hose itself without fitting