


SIDE STAND YS-220 for JOG / EX / -Z

| | |
|-------------|-----------------------------------|
| CODE | 656-0010220 |
| APPLICATION | JOG (3YJ) /JOG-EX/-Z (3YK1 ~ 3/5) |

Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

ATTENTION (MUST READ)


- ▲Pay attention to below to install side stand. Assembling mistake and improper setting may cause of trouble and accident.
- We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- Please ask authorized mechanic for assembling and setting. Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- This product is designed and made exclusive for application models, do not use other models.
- The vehicle height is changed because of changing rear shock, etc may cause of falling because of stand degree. Please install with stock condition.
- After installation, move side stand back and forth, check the strage position and positon to stable vehicle.
- Do not shake or jump on the vehicle with using side stand. It might cause of breaking side stand, surrounding parts and accident.
- Do not over weight. It causes of falling.
- Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.
- Please give this instruction sheet when you sell to someone.




This instruction sheet is for who has basic maintenance knowledge. Do not operate if you do not have any skills and knowledge.



Do not modify the way which is not listed or it will cause damage and trouble.

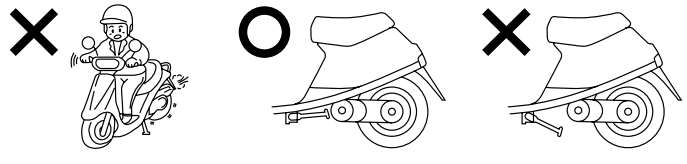

Do not start engine with using side stand. It might cause of jump out the vehicle and falling. Please storage side stand before riding.

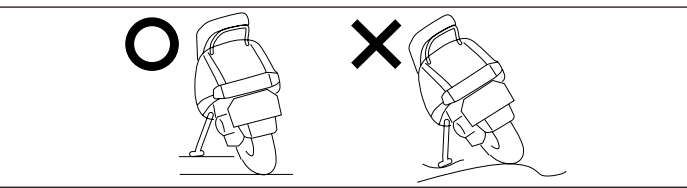

Do not use side stand on soft mud, bumpy road, etc. Check the side stand on the flat hard road to not falling before using side stand.

REQUIRED TOOL : SPANNER

PACKING LIST

| FIGURE | NAME | QTY |
|--------|----------------------------|-----|
| 1 | STAND MAIN UNIT | 1 |
| 2 | NUT 12mm | 1 |
| 3 | SPRING WASHER 12mm | 1 |
| 4 | INSTRUCTION SHEET / REMARK | 1 |

210903

INSTALLATION ILLUSTRATION

HOW TO INSTALL

- 1) Firstly, remove side cover L screw (A~C) as illustration I.
 - 2) Cut out the inner fender (D) part on illustration II by cutter knife. (Cut out part is from inside, illustration II dotted line, streaks appear due to embossing.)
 - 3) Install side stand main unit to vehicle bracket from cut out part under side as illustration III.
- *At that time, pull inner fender to install, tighten with spring washer (12mm) and nut (12mm) from a gap between floor and inner fender.
- 4) Put inner fender and side cover L back on illustration II, tighten screw (A~C) to finish installation.

