

<b>HANDLE STOPPER</b>	CODE : 560-1432010
APPLICATION : GROM (FNO,JC61-1000001 ~ 129999/JC61-1300001 ~ ) / RACE BASE MODEL	
<b>ATTENTION ! HORN / HANDLE LOCK NOT USABLE (NOT STREET USE)</b>	
KITACO HANDLE STOPPER is to narrow the full steering angle to prevent handle from interfering vehicle. Only for circuit use. It might not be enough to prevent from falling, due to aftermarket handle bar shape.	


• Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

**■ ATTENTIONS (MUST READ)**

- HANDLE STOPPER is designed and made exclusive for GROM, do not use on other models.
  - Do not modify the way which is not listed or it will cause damage and trouble.
  - Please ask authorized mechanic for assembling and setting.
- Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer HONDA service manual when installation.
  - Bolts and nuts may get loosen by engine vibration.
- Please check and make sure each part of bolts and nuts are not loose before running.
- This instruction sheet is for the instruction with stock condition.
  - Please contact a mechanic nearby immediately when you find something unusual.
- ※Metal / resin products will have rust for ages. Please understand when using

PACKING LIST			
NAME	CODE	QTY	
HANDLE STOPPER	-	1	
SH BOLT WITH FLANGE M6X10	062-0560010	1	

※ Refer to the manufacturer HONDA service manual when installation.

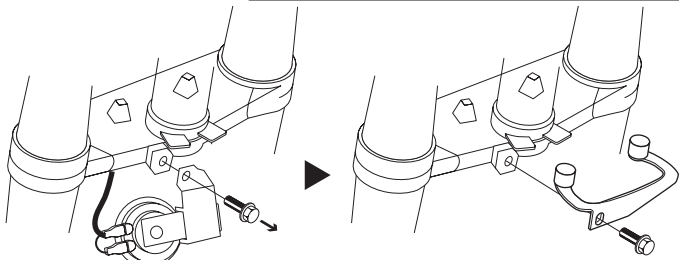

Remove horn & wire connector.  
Make insulation treatment on wire connector not to interfere when driving.

Tighten handle stopper with OEM bolt or bolt in the kit on horn installing position.

3-8-13 NAGATA  
HIGASHI-OSAKA,  
OSAKA, 577-0015,



JAPAN  
<http://www.kitaco.co.jp/>

<b>HANDLE STOPPER</b>	CODE : 560-1432010
APPLICATION : GROM (FNO,JC61-1000001 ~ 129999/JC61-1300001 ~ ) / RACE BASE MODEL	
<b>ATTENTION ! HORN / HANDLE LOCK NOT USABLE (NOT STREET USE)</b>	
KITACO HANDLE STOPPER is to narrow the full steering angle to prevent handle from interfering vehicle. Only for circuit use. It might not be enough to prevent from falling, due to aftermarket handle bar shape.	


• Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

**■ ATTENTIONS (MUST READ)**

- HANDLE STOPPER is designed and made exclusive for GROM, do not use on other models.
  - Do not modify the way which is not listed or it will cause damage and trouble.
  - Please ask authorized mechanic for assembling and setting.
- Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer HONDA service manual when installation.
  - Bolts and nuts may get loosen by engine vibration.
- Please check and make sure each part of bolts and nuts are not loose before running.
- This instruction sheet is for the instruction with stock condition.
  - Please contact a mechanic nearby immediately when you find something unusual.
- ※Metal / resin products will have rust for ages. Please understand when using

PACKING LIST			
NAME	CODE	QTY	
HANDLE STOPPER	-	1	
SH BOLT WITH FLANGE M6X10	062-0560010	1	

※ Refer to the manufacturer HONDA service manual when installation.

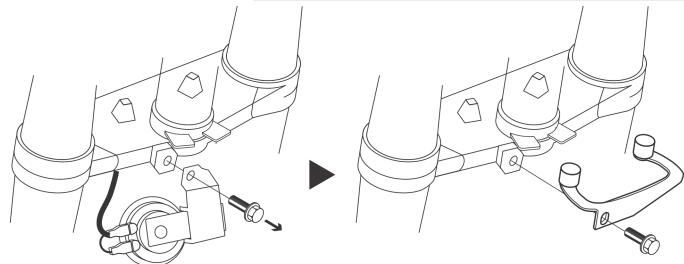

Remove horn & wire connector.  
Make insulation treatment on wire connector not to interfere when driving.

Tighten handle stopper with OEM bolt or bolt in the kit on horn installing position.

3-8-13 NAGATA  
HIGASHI-OSAKA,  
OSAKA, 577-0015,



JAPAN  
<http://www.kitaco.co.jp/>

<b>HANDLE STOPPER</b>	CODE : 560-1432010
APPLICATION : GROM (FNO,JC61-1000001 ~ 129999/JC61-1300001 ~ ) / RACE BASE MODEL	
<b>ATTENTION ! HORN / HANDLE LOCK NOT USABLE (NOT STREET USE)</b>	
KITACO HANDLE STOPPER is to narrow the full steering angle to prevent handle from interfering vehicle. Only for circuit use. It might not be enough to prevent from falling, due to aftermarket handle bar shape.	


• Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

**■ ATTENTIONS (MUST READ)**

- HANDLE STOPPER is designed and made exclusive for GROM, do not use on other models.
  - Do not modify the way which is not listed or it will cause damage and trouble.
  - Please ask authorized mechanic for assembling and setting.
- Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer HONDA service manual when installation.
  - Bolts and nuts may get loosen by engine vibration.
- Please check and make sure each part of bolts and nuts are not loose before running.
- This instruction sheet is for the instruction with stock condition.
  - Please contact a mechanic nearby immediately when you find something unusual.
- ※Metal / resin products will have rust for ages. Please understand when using

PACKING LIST			
NAME	CODE	QTY	
HANDLE STOPPER	-	1	
SH BOLT WITH FLANGE M6X10	062-0560010	1	

※ Refer to the manufacturer HONDA service manual when installation.

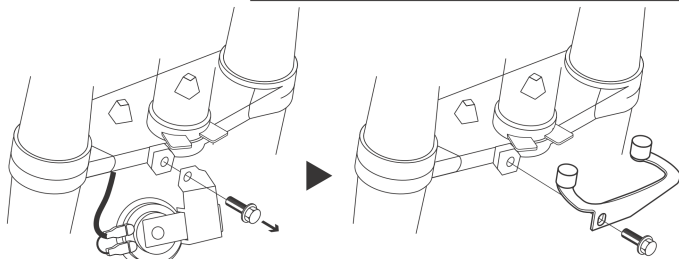

Remove horn & wire connector.  
Make insulation treatment on wire connector not to interfere when driving.

Tighten handle stopper with OEM bolt or bolt in the kit on horn installing position.

3-8-13 NAGATA  
HIGASHI-OSAKA,  
OSAKA, 577-0015,



JAPAN  
<http://www.kitaco.co.jp/>

<b>HANDLE STOPPER</b>	CODE : 560-1432010
APPLICATION : GROM (FNO,JC61-1000001 ~ 129999/JC61-1300001 ~ ) / RACE BASE MODEL	
<b>ATTENTION ! HORN / HANDLE LOCK NOT USABLE (NOT STREET USE)</b>	
KITACO HANDLE STOPPER is to narrow the full steering angle to prevent handle from interfering vehicle. Only for circuit use. It might not be enough to prevent from falling, due to aftermarket handle bar shape.	


• Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

**■ ATTENTIONS (MUST READ)**

- HANDLE STOPPER is designed and made exclusive for GROM, do not use on other models.
  - Do not modify the way which is not listed or it will cause damage and trouble.
  - Please ask authorized mechanic for assembling and setting.
- Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer HONDA service manual when installation.
  - Bolts and nuts may get loosen by engine vibration.
- Please check and make sure each part of bolts and nuts are not loose before running.
- This instruction sheet is for the instruction with stock condition.
  - Please contact a mechanic nearby immediately when you find something unusual.
- ※Metal / resin products will have rust for ages. Please understand when using

PACKING LIST			
NAME	CODE	QTY	
HANDLE STOPPER	-	1	
SH BOLT WITH FLANGE M6X10	062-0560010	1	

※ Refer to the manufacturer HONDA service manual when installation.

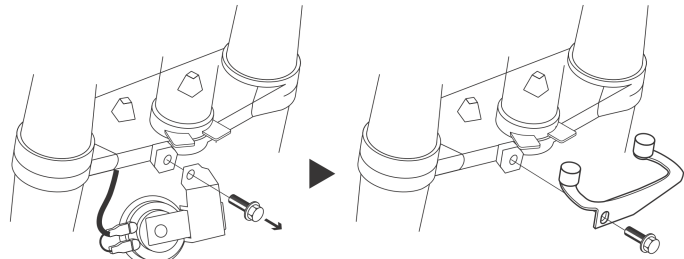

Remove horn & wire connector.  
Make insulation treatment on wire connector not to interfere when driving.

Tighten handle stopper with OEM bolt or bolt in the kit on horn installing position.

3-8-13 NAGATA  
HIGASHI-OSAKA,  
OSAKA, 577-0015,



JAPAN  
<http://www.kitaco.co.jp/>